

1394b PHY Core

PHY Layer IP Core for 1394b

Applications

- Avionics vehicle and mission systems
- Industrial/Machine vision systems

Benefits

- Increase interface port density while lowering size and power
- Additional diagnostics and programmable operation features
- Leverage proven technology for standard interface implementation

Features


- AS5643 compliant interface
- Supports S100/S200/S400/S800/S1600/S3200 data rates
- Complete PHY layer implementation
- Configurable number of ports per PHY instantiation
- Configurable number of PHYs in a single FPGA Standard PHY-Link interface

Overview

The New Wave Design and Verification (New Wave DV) 1394b PHY core provides a complete IP solution for the PHY layer of the 1394b protocol. The core includes all functionality needed to meet the 1394b specification including: comma alignment, 8b/10b encode/decode, primitive decode, scrambling, port state machine, connection manager, arbitration controller, elastic FIFO, and phase FIFO.

At the physical layer, the core is built for connecting to FPGA/ASIC embedded SERDES, discrete SERDES parts, or general purpose IO. The Link Layer interface of the core provides the industry standard PHY-Link interface. This PHY-Link interface connects directly to Link Layer IP cores from New Wave DV, to discrete Link Layer integrated circuits, or to custom logic developed by the end user.

This core is targeted towards applications in aerospace and industrial vision, and has been used on a wide range of parts at varying operating rates. The core comes with test-benches and example code, making design integration a straightforward task.

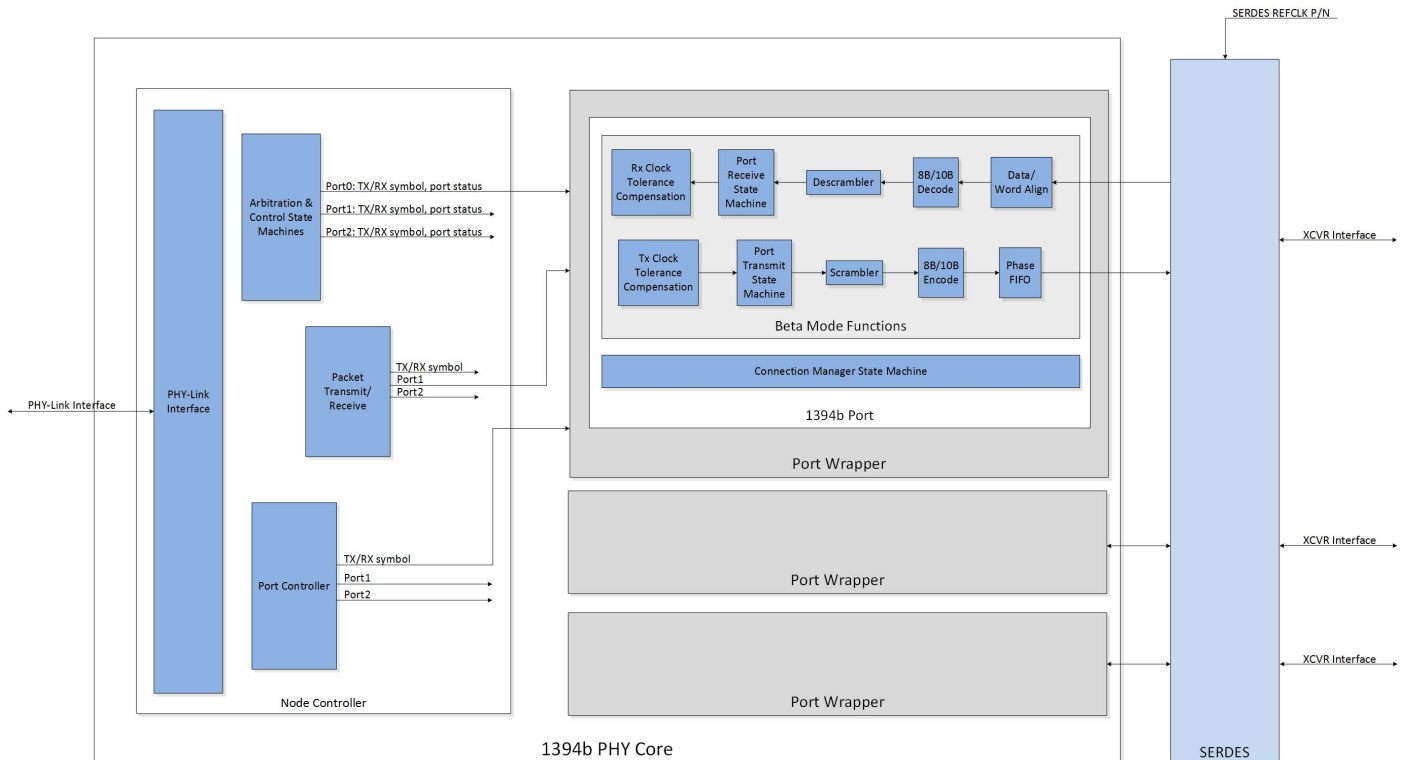

1394b PHY Core

PHY Layer IP Core for 1394b

Functional Description

The 1394b PHY IP core was developed as a 1394b-AS5643 compliant IP-based replacement to existing discrete 1394b PHY integrated circuits. The IP core implementation provides significant operational benefits including size, weight, and power savings over legacy discrete component implementations.

Use of an IP-core based implementation for 1394b also significantly mitigates future obsolescence issues. Discrete component 1394b options are now offered by only one vendor. Since the PHY core from New Wave DV can operate in all FPGA technologies including but not limited to Xilinx, Intel (Altera), and Microsemi; future implementation options are assured.

In the PHY core, New Wave DV provides diagnostic and operating capabilities that are not available in the 1394b discrete components. These additional capabilities include diagnostic information, shortened tuning times, fixed topology configurations, reset storm prevention, and hardware-based AS5643 STOF offload.

The PHY core can be instantiated multiple times in a single part. The PHY core also has a configurable number of ports per PHY instantiation. Customers have taken advantage of this capability to build PHYs with port counts of 1, 2, 3, 4, or higher. This customization allows for the most efficient use of FPGA/ASIC resources.

By taking advantage of modern FPGA technology, and using this IP core along with 1394b Link Layer cores from New Wave DV, it is feasible to implement in one FPGA what used to be implemented in 8-10 discrete components. Each of those discrete integrated circuits being the size of the one FPGA/ASIC using the New Wave DV IP cores. This is a board-space savings for high-density 1394b applications of roughly 10:1.

Evaluation versions of the PHY IP core are available and New Wave DV has a set of standard form-factor boards featuring FPGAs, 1394b connectors and transformers, and off-the-shelf reference designs for quick evaluation of the PHY IP core.

Technical Specifications

Core is delivered in netlist format including constraint files

SUPPORTED DEVICES

Xilinx: Virtex, Kintex, Artix FPGAs
Intel (Altera): Stratix, Arria, Cyclone FPGAs
Microsemi: SmartFusion2, Igloo2 FPGAs

SUPPORTED RATES

S100/S200/S400/S800/S1600/S3200

OPERATING FREQUENCIES

S100: 12.288Mhz
S200: 24.576MHz
S400: 49.152MHz
S800: 98.304MHz
S1600: 196.608MHz
S3200: 196.608MHz (double data width)

Ordering Information

700-FW100-00-00: 1394b PHY layer core, beta mode only, S100/S200/S400 rate support

700-FW100-01-00: 1394b PHY layer core, beta mode only, S800/S1600/S3200 rate support

Other product configurations are available. Please contact us.

FOR MORE INFORMATION:

www.newwavedv.com
info@newwavedv.com
Phone +1 952-224-9201

New Wave DV
4031 Highway 7
Suite 190
St. Louis Park, MN 55416 USA

