

Fibre Channel Anonymous Subscriber Messaging (ASM) IP Core

IP Core for Fibre Channel ASM

Applications

- Avionics vehicle and mission systems
- Industrial/Machine vision systems

Benefits

- Increased performance with hardware-based FC-ASM offload
- Label mapping
- Leverage proven technology for standard interface implementation

Features

- FC-ASM compliant interface with hardware based offload
- Hardware DMA engines with message label mapped buffers
- Receive and transmit functions offloaded in hardware
- Supports 1/2/4/8/16G data rates
- Configurable number of ports in a single FPGA
- AXI-based host interface for embedded or PCIe based processors

Overview


The New Wave Design and Verification (New Wave DV) IP core provides a complete hardware IP solution for the FC-ASM protocol.

The core provides hardware-based message label filtering, hardware mapping of message label to host memory, and complete offload of ASM handling including: Transmit message, Receive message, CSU, and CRC generation/checking.

The host interface to the core can be AXI or PCIe. The core is built for dropping into an FPGA and providing the complete design from processor interface to FC-ASM network interface.

This core is targeted towards applications in aerospace and has been used on a wide range of parts at varying operating rates. The core comes with test-benches and example code, making design integration a straightforward task.

Evaluation versions of the FC-ASM IP core are available and New Wave DV has a set of standard form-factor boards featuring FPGAs, Fibre Channel optics, and off-the-shelf reference designs for quick evaluation of the IP core.

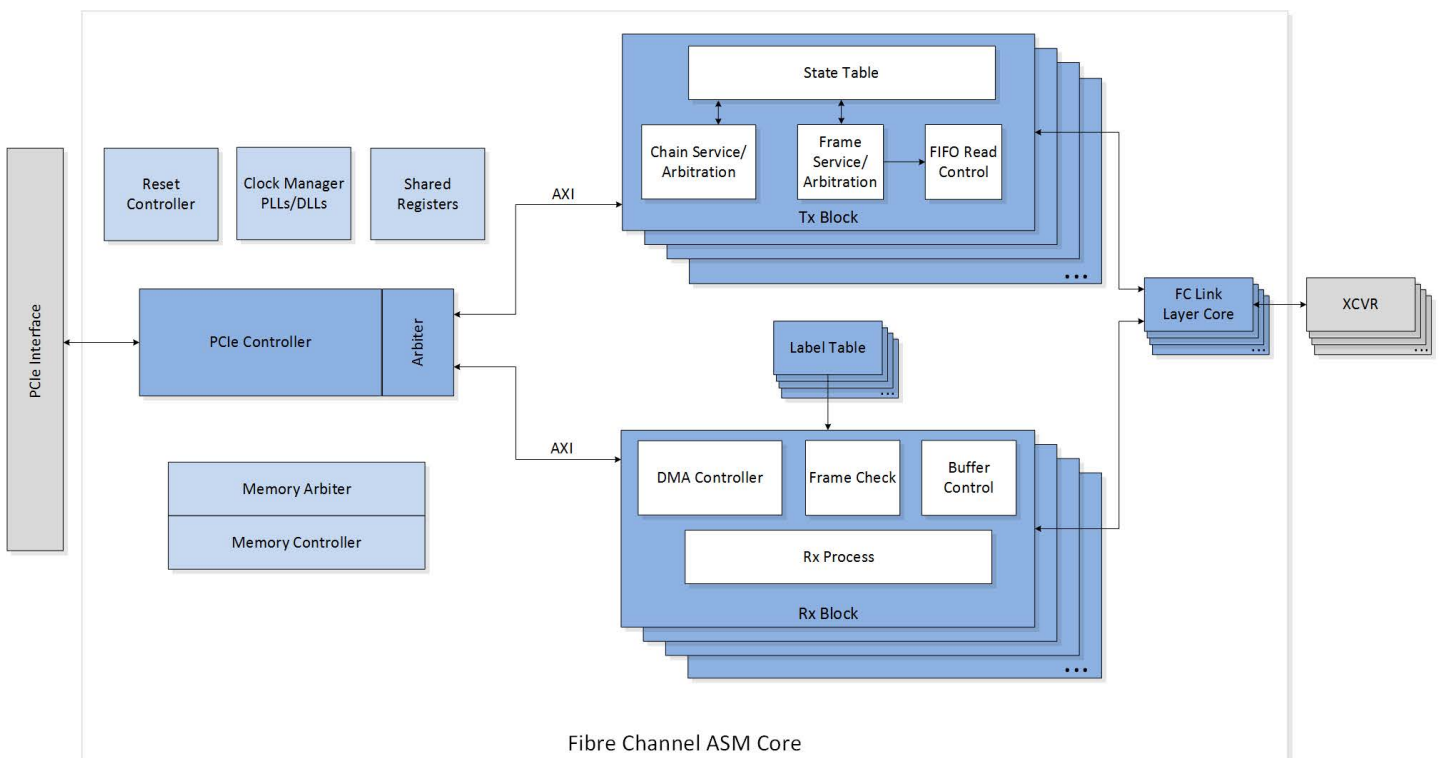

Fibre Channel Anonymous Subscriber Messaging (ASM) IP Core

= \ - IP Core for Fibre Channel ASM

Complete Product Support Program

Our customers can attest to our exceptional support. New Wave DV provides an industry-standard warranty on its products, but it is the human factor that makes our support so valuable to our customers. Our team takes the time and effort to ensure a positive customer experience.

Our Commitment

New Wave DV is committed to providing the latest innovations in technology, architectures, and techniques to keep our customers one step ahead of the rest. Our products, complete with expressXG Development Framework, are designed to offer our customers an entirely unique out-of-the-box experience.

New Wave DV FC ASM Cards

In addition to the FC-ASM core, New Wave DV provides standard form-factor FC-ASM interface cards that incorporate the FC-ASM interface core along with high performance DMA engines and software drivers. Available in PMC/XMC form-factors, New Wave DV FC-ASM cards provide up to 4 ports in a single card. Reach us at info@newwavedv.com to ask about our FC-ASM solutions.

Technical Specifications

Core is delivered in netlist format including constraint files.

SUPPORTED DEVICES

Xilinx: Virtex, Kintex, Artix FPGAs
Intel (Altera): Stratix, Arria, Cyclone FPGAs
Microsemi: SmartFusion2, Igloo2 FPGAs

SUPPORTED RATES

1/2/4/8/16G

OPERATING FREQUENCIES

1G: 26Mhz
2G: 53MHz
4G: 106MHz
8G: 212Mhz
16G:212Mhz (double data width)

Ordering Information

700-FC300-00-00: Fibre Channel ASM Offload Engine core, 1/2/4G rate support

700-FC300-01-00: Fibre Channel ASM Offload Engine core, 1/2/4/8/16G rate support

Other product configurations are available. Please contact us.

FOR MORE INFORMATION:

www.newwavedv.com
info@newwavedv.com
Phone +1 952-224-9201

New Wave DV
4950 W 78th St. Minneapolis,
MN 55416 USA

